




Dell XPS 10 Battery Replacement

This guide should help you to replace your battery if it is no longer holding a charge or if your device will not charge even with a working charger.

Written By: saraspam

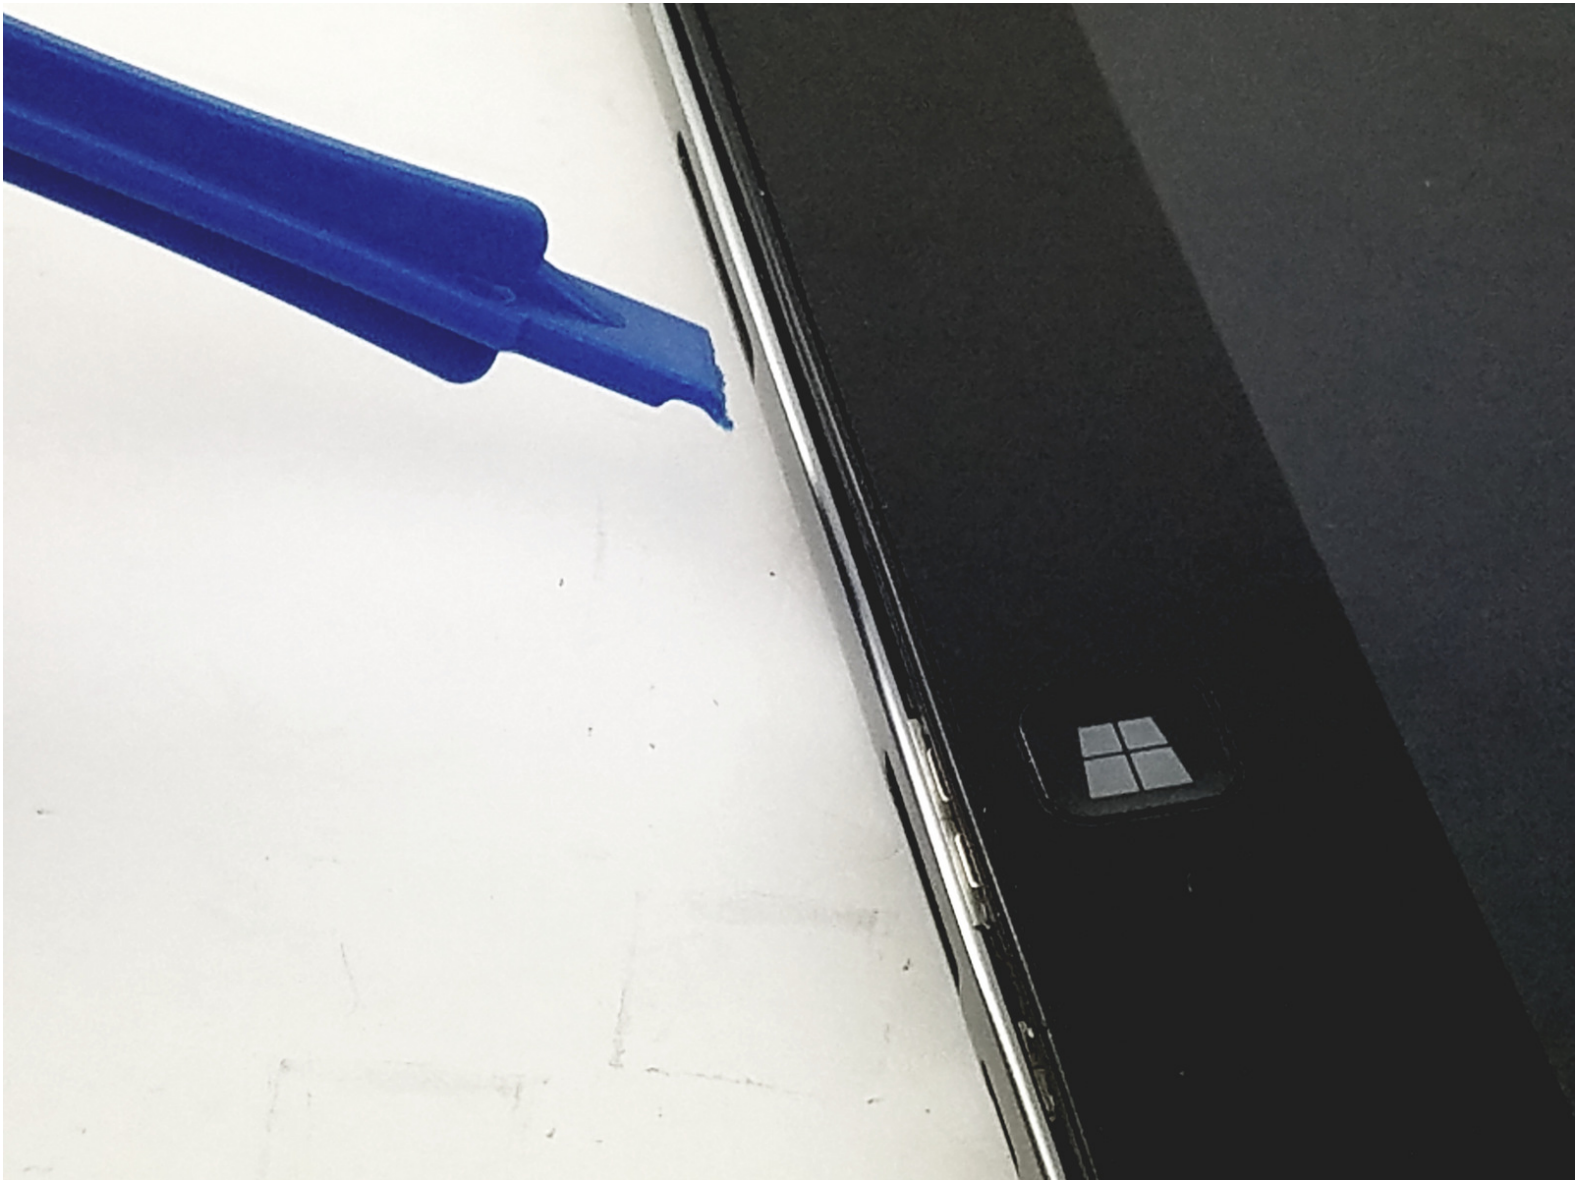

INTRODUCTION

If you have a battery that is no longer in working order then you will need to replace the battery. It is not as simple as removing it after taking off the cover. You will need a couple removal tools for reaching the battery. There are no hazards for this particular repair.



TOOLS:


- [iFixit Opening Tools](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Battery



- Slide one of the plastic opening tools in the crack as shown in the first picture.
- Slide the other plastic opening tool facing the opposite way in the crack next to the first one and pry the back cover off a little bit at a time or slide them around the edge as necessary.
- Finally, slide the two plastic opening tools all around the case until it is open.

Step 2

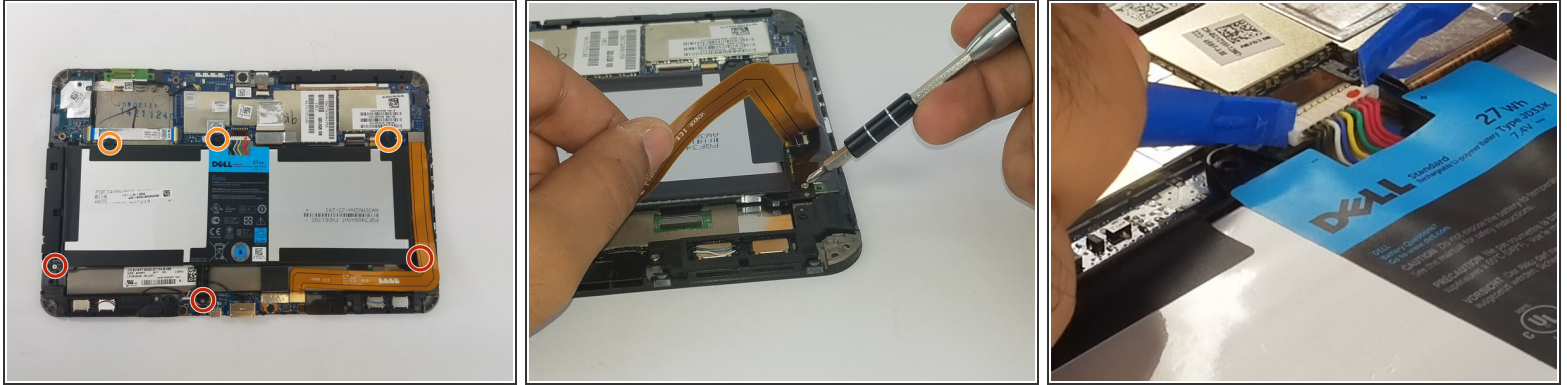

- Unscrew the six screws shown in the picture with a phillips screwdriver size PH 0. Do not miss the screw under the gold/orange ribbon cable.
- ⓘ It is important to note that the three screws on the top portion of the battery are shorter and are black color coded while the three other screws towards the bottom of the battery are longer and are silver.
- 4 mm screws
- 3 mm screws
- Unplug the connector the connects the battery to the mother board.
- ⓘ Make sure to use a plastic opening tool instead of a metal spudger to avoid any unnecessary accidental shorting out of components.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 03:15:59 AM.